





Clear spanning

OWAlifetime collection


OWA

System S 6 | clear spanning

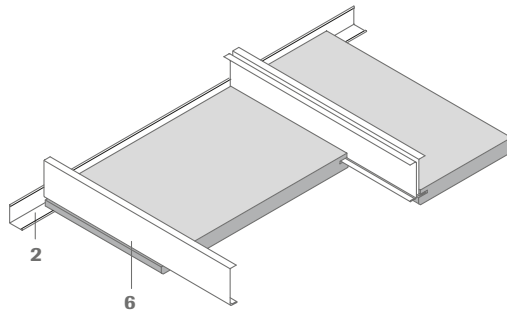


- 1 Wall angle no. 51/20, 20/50 mm, ~ 1.0 mm thickness, pre-drilled
- 2 Wall angle no. 51/25, 25/25 mm, ~ 1.0 mm thickness
- 3 Shadow wall angle no. 56/21, 20/20/20/25 mm, ~ 1.0 mm thickness
- 4 Shadow wall angle no. 50/22, 15/9/15/30 mm, ~ 1.0 mm thickness, pre-drilled
- 5 Z profile no. 19/10
- 6 C profile no. 36 or 36/70 (2 pieces)
- 7 T profile no. 40


Cross-section:




System S 6a – concealed non demountable




System S 6a – concealed demountable



System S 6b – visible in combination with Contura edges






System S 6c – visible



System S 6d – concealed, demountable

Wall perimeter:

for system S 6a, S 6c and S 6d



for system S 6 b

With systems S 6b and S 6c the metal sections supporting the long edges of the OWAacoustic ceiling tiles are loose laid onto the perimeter wall angles. To ensure that there is no lateral movement of the installed tiles it is recommended that every 5th supporting section is secured to the walls or structural soffit. Profiles no. 45 can be secured with angle bracket no. 8017. For further examples of wall perimeters and installation details see [OWA-Installation Guide 9801 e](#).

Technical data | mineral tiles

Dimensions/Designs

For possible dimensions and designs please refer to [OWA Ceiling System Catalogue 7000](#).

Edge details

Short edge Long edges



S 6a:



S 6b:



S 6c:



S 6d:



Thickness

Approx. 15 mm and 20 mm (OWAacoustic premium)

Reaction to fire

A2-s1,d0 in accordance with EN 13501-1

Resistance to fire

System S 6a: see [OWA-brochure 9501 eu e](#) (with C profile no. 36/70 only)
Systems S 6b, S 6c and S 6d have no certification.


Metal suspensions

All metal components listed are galvanized steel or white coated galvanized steel respectively. For further details and colours please consult [OWA Ceiling System Catalogue 7000](#).


Suspension depth

S 6a: depending on wall profile, reinforcement profile and tile length
S 6b and S 6c: 120 - 150 mm
S 6d: ca. 165 mm

Installation example:

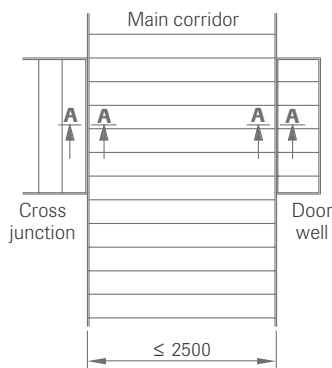


Section A-A

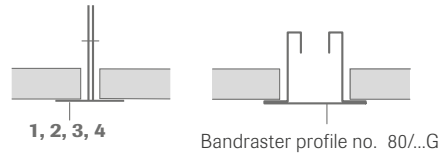

The perimeter wall details in the main corridor should be installed for best optical effect. At corridor cross junctions and in door wells it is also possible to make a perfect transition between the ceiling surfaces. Other junction connections are possible, for example with Bandraster profiles which are extremely rigid and can provide security against pressure and lateral thrust.

Light fixtures:

OWA can supply compatible light fixtures for this system.



For details of performance, installation and fire resistance please see [OWA-brochure 9630 e](#) and [OWA-Installation Guide 9801 e](#).

Profile span widths: measures in mm

Item no.	Profile description	Stalk height	Material thickness	Up to 312.5 mm		Up to 400 mm	
				15 mm	20 mm	15 mm	20 mm
20	Z profile (galv.)	21	0.5	1490	1400	1410	1330
19	Z profile (galv.)	70	0.5	2500	2500	2500	2500
19/10	Z profile (galv.)	70	0.6	2500	2500	2500	2500
45	Main tee (white)	38	2 x 0.3	1940	1820	1840	1730
40	Main tee (white)	70	0.6	2500	2500	2500	2500
37	L profile (galv.)	25	0.6	1600	1510	1520	1430
36	C profile (galv.)	50	0.6	2500	2500	2500	2500
36/70	C profile (galv.)	70	0.6	2500	2500	2500	2500

The above OWA-span chart restricts its recommendations to a maximum section deflection of 2.5 mm for best optical effect. For special situations, for example the addition of wool overlays, light fittings or cold roofs, high humidity and open areas etc., see [OWA-Installation Guide 9801 e](#).

Important! In areas requiring fire protection, main tee no. 45 should be used.

Weight per m²:

Suspension approx.	0.90 - 3.20 kg
Tile 15 mm, approx.	4.5 kg/m ²
Tile 20 mm, approx.	6.0 kg/m ²

System description:

Clear spanning OWAconstruct System S 6a (concealed system, tiles demountable/non-demountable)

Quality requirements for mineral tiles:

OWAacoustic mineral tiles firmly bound with a primer coat on both sides. The tile is free from asbestos. No formaldehyde is added in the manufacturing process of the mineral tiles. The mineral wool used for the manufacture of the tile is bio-soluble. The criteria for non-classification as a carcinogenic substance in accordance with the Chemicals Prohibition Ordinance (Section 1 Appendix, Paragraph 23 biopersistent fibres) are met and guaranteed by the 'RAL seal of approval for mineral wool'. Verification of fitness for use according to EU CPR: CE marking and Declaration of Performance (DoP).

Mineral tiles accordance with EN 13964 and DIN 18177:

Air permeability class	PM 1
Formaldehyde class	FH 1
Emission of VOC	TVOC 1

Installation should be carried out in accordance with the information contained in system leaflet S 6a and [OWA-Installation Guide 9801 e](#). All components are CE labelled.

Component list:

OWAconstruct Z profile no. 19/10 (tiles non-demountable) or C profile no. 36/70 (2 pieces per joint – tiles demountable), galvanized
OWAconstruct wall angles no. 51/20, no. 51/25, no. 56/21 or no. 50/22, visible surfaces white painted

Clear spanning OWAconstruct System S 6b – Contura edge (exposed system, tiles demountable)

Quality Statement: as for system S 6a

Installation should be carried out in accordance with the information contained in system leaflet S 6b and [OWA-Installation Guide 9801 e](#). All components are CE labelled.

Component list:

OWAconstruct T profile no. 45 or T profile no. 40, visible surfaces white painted
OWAconstruct wall angle no. 50/22, visible surfaces white painted
OWAconstruct Contura-filler block no. 42/24

Clear spanning OWAconstruct System S 6c (exposed system, tiles demountable)

Quality Statement: as for system S 6a

Installation should be carried out in accordance with the information contained in system leaflet S 6c and [OWA-Installation Guide 9801 e](#). All components are CE labelled.

Component list:

OWAconstruct T profile no. 45 or T profile no. 40, visible surfaces white painted
OWAconstruct shadow wall angles no. 51/20, no. 51/25, no. 56/21 or no. 50/22, visible surfaces white painted

Clear spanning OWAconstruct System S 6d (exposed system, tiles demountable)

Quality Statement: as for system S 6a

Installation should be carried out in accordance with the information contained in system leaflet S 6d and [OWA-Installation Guide 9801 e](#). All components are CE labelled.

Component list:

OWAconstruct Z profile no. 19/10, OWAconstruct wall angles no. 51/20, no. 51/25, no. 56/21 or no. 50/22, visible surfaces white painted



Certified Management Systems

Product warranties

The information provided in this leaflet is based on the standards and data available at the time of publication. Any performance, warranties or guarantees provided, expressed or implied, are subject to the exclusive use of OWA components and the installation of those components in accordance with our recommendations. Failure to adhere to these conditions will result in the invalidation of any performance claims, warranties or guarantees and rejection of any liability. OWA reserves the right to make any technical improvements to the products, systems or services without prior notice. **All goods and services are supplied in accordance with our current Terms and Conditions of Sale.** Errors excepted!



The information in this brochure is up-to-date at the time of publication. Subject to alterations. Please contact our OWAconsult team for specific advice. Our experts will be happy to answer your questions using the following contact details: tel: +49 9373 201-444 or e-mail: info@owaconsult.de

Odenwald Faserplattenwerk GmbH

Dr.-F.-A.-Freundt-Straße 3 | 63916 Amorbach | Germany
tel +49 9373 201-0 | info@owa.de
www.owa-ceilings.com