





Acoustic, design and colour.
Feel free to create your own style.


1 FreeStyle S

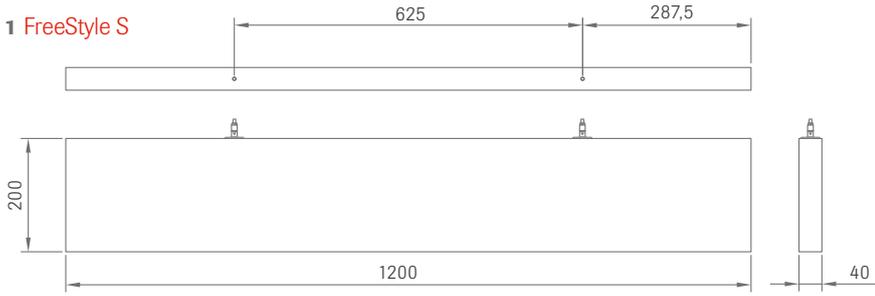

2 FreeStyle M

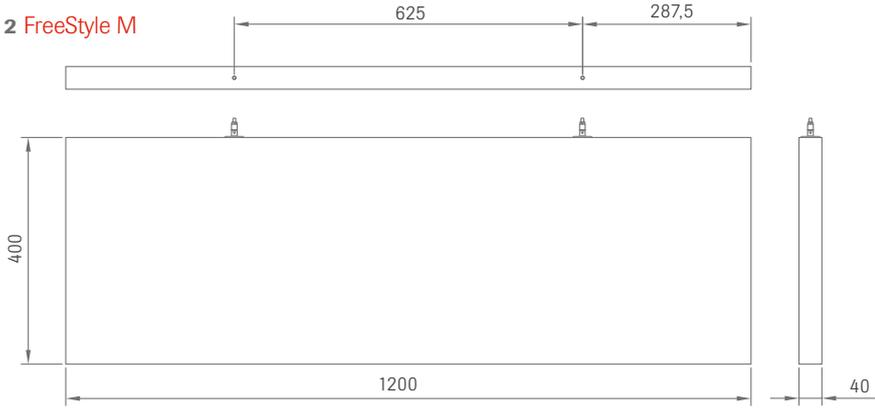

3 FreeStyle L

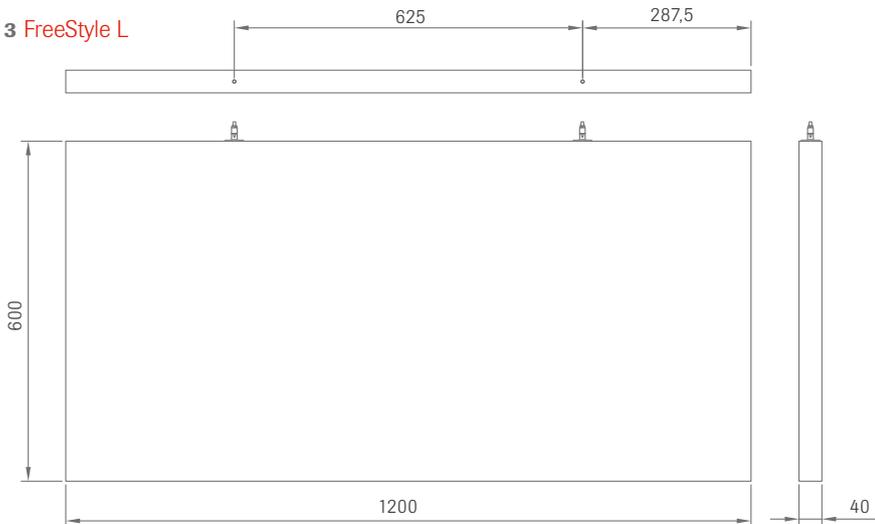

Detail



Technical data



Visible side

White fleece or coloured fabric

Edge

White fleece or coloured fabric

Edge detail

Straight edges, all the way round

Dimensions and weight

FreeStyle S: 1200 x 200 x 40 mm, approx. 1.3 kg
 FreeStyle M: 1200 x 400 x 40 mm, approx. 2.6 kg
 FreeStyle L: 1200 x 600 x 40 mm, approx. 4.0 kg
 Special formats/special shapes on request.

Reaction to fire (white fleece)

A2-s1,d0 according to EN 13501-1:2019-05


Grid suspension

Wire suspension: length = 1.5 m, ceiling fixation

Sound absorption

 $\alpha_w = 0.60$ | NRC = 0.70


* Applies only to white fleece

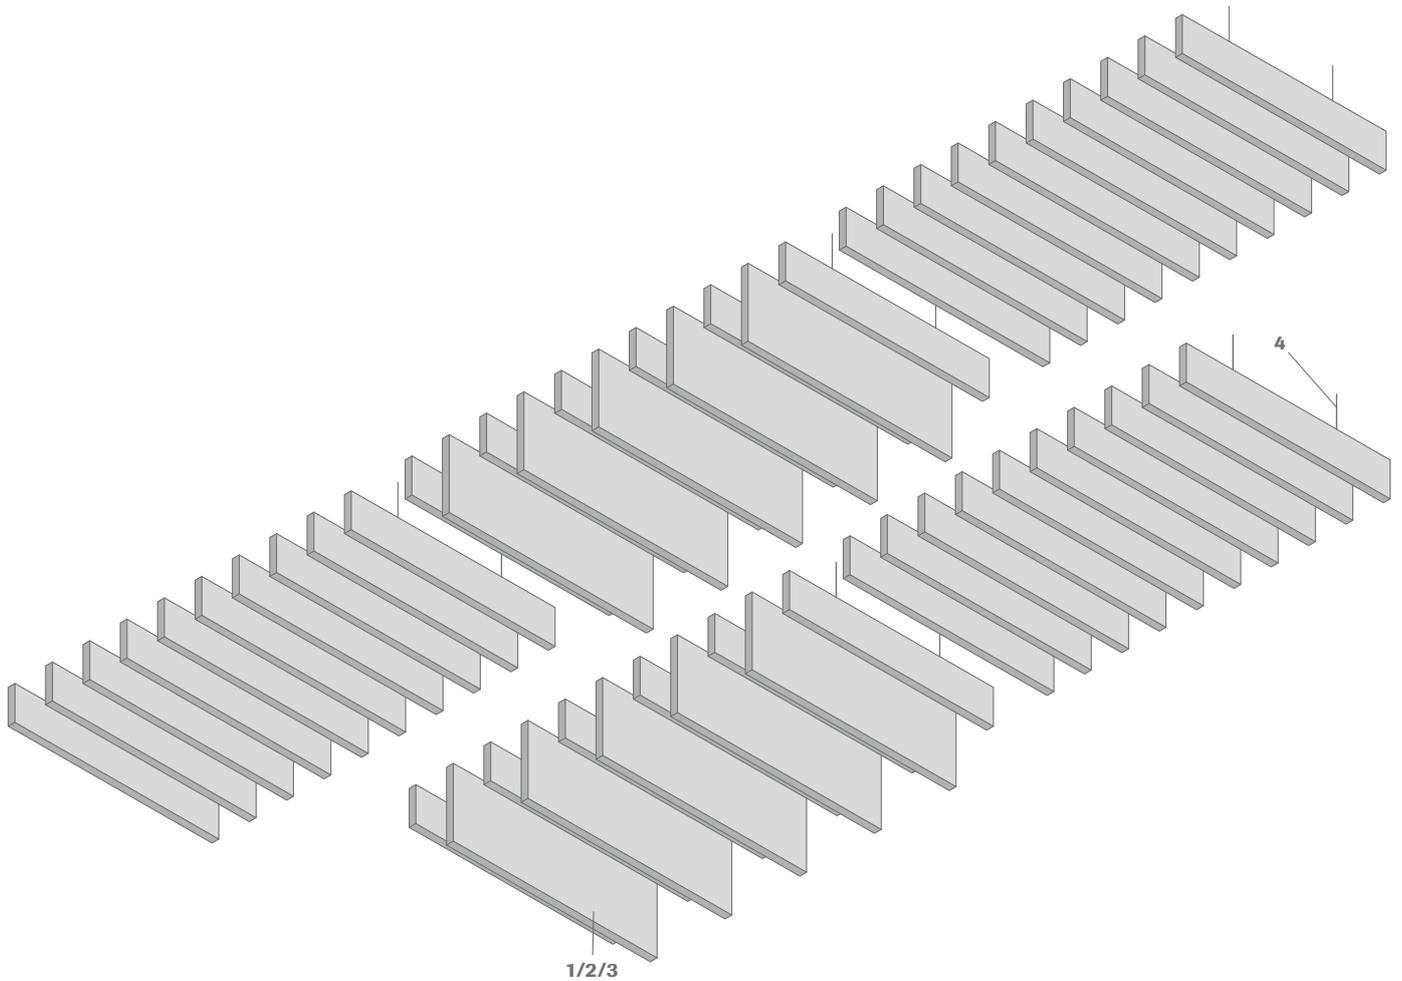


FreeStyle | Content baffle tile package

Pack	Description/dimensions/surface	Units/pack
1 FreeStyle S	Baffle, 1200 x 200 x 40 mm, coloured fabric	6
	Baffle, 1200 x 200 x 40 mm, fleece covered white	6
2 FreeStyle M	Baffle, 1200 x 400 x 40 mm, coloured fabric	3
	Baffle, 1200 x 400 x 40 mm, fleece covered white	3
3 FreeStyle L	Baffle, 1200 x 600 x 40 mm, coloured fabric	2
	Baffle, 1200 x 600 x 40 mm, fleece covered white	2


4 FreeStyle | Fitting set for wire suspension

	Description/dimensions/surface	Units/set
	Self-drill fixing with integrated rope-quick adjuster, zinc	2
	Steel rope (thermally sealed one end with 'eye' the other), length 1500 mm, diameter = 1.2 mm, galvanized	2
	2-part brass ceiling fastener, Ø16mm collar (upper part = M13x1 external thread and M6 internal thread / lower part = M13x1 internal thread, length: 16 mm)	2


1 FreeStyle S

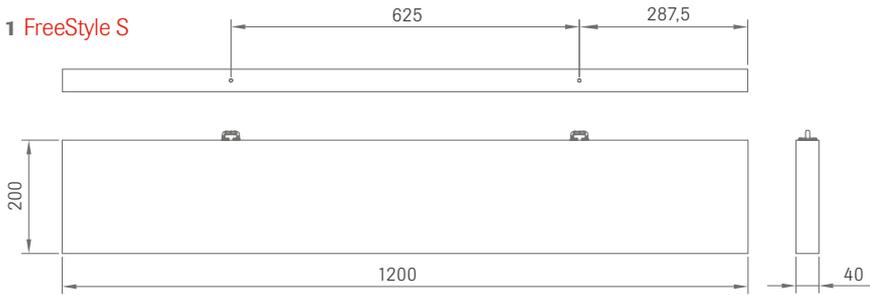


2 FreeStyle M

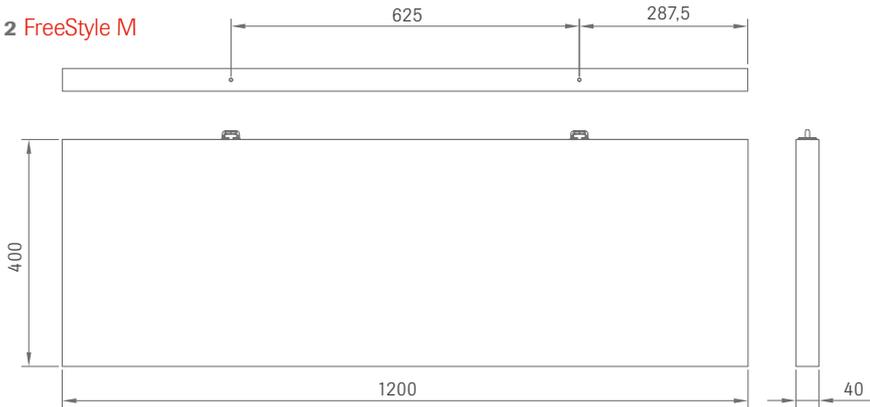

3 FreeStyle L

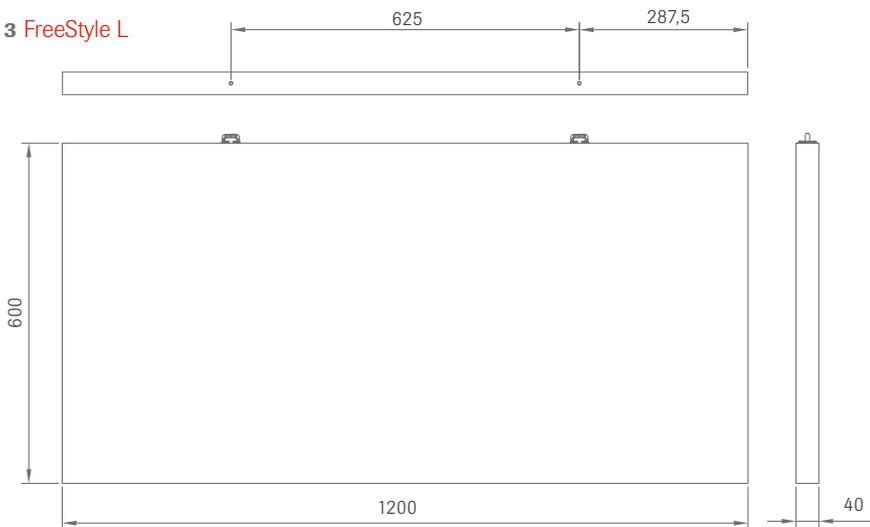

Detail

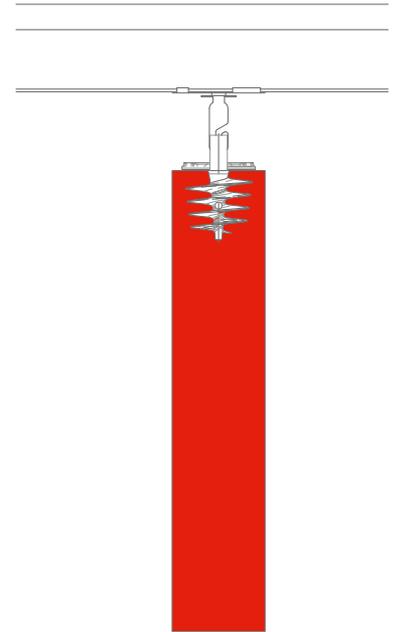

Technical data

**Visible side**

White fleece or coloured fabric

Edge

White fleece or coloured fabric

Edge detail

Straight edges, all the way round

Dimensions and weight

FreeStyle S: 1200 x 200 x 40 mm, approx. 1.3 kg

FreeStyle M: 1200 x 400 x 40 mm, approx. 2.6 kg

FreeStyle L: 1200 x 600 x 40 mm, approx. 4.0 kg

Special formats/special shapes on request.


Reaction to fire (white fleece)

A2-s1,d0 according to EN 13501-1:2019-05

Grid suspension

System S 3: suspension on main tee no. 45



Sound absorption $\alpha_w = 0.60$ | NRC = 0.70

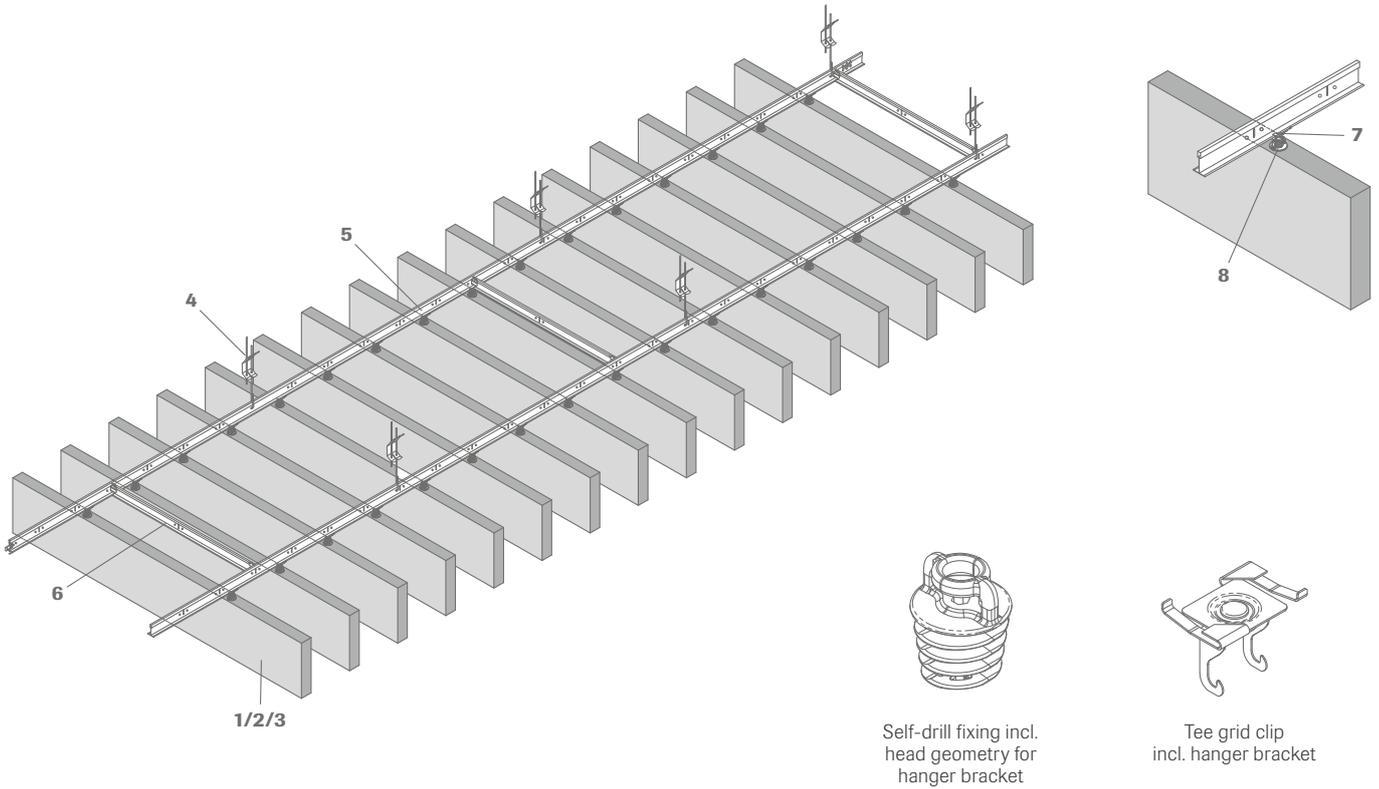


FreeStyle | Content baffle tile package

Pack	Description/dimensions/surface	Units/pack
1 FreeStyle S	Baffle, 1200 x 200 x 40 mm, coloured fabric	6
	Baffle, 1200 x 200 x 40 mm, fleece covered white	6
2 FreeStyle M	Baffle, 1200 x 400 x 40 mm, coloured fabric	3
	Baffle, 1200 x 400 x 40 mm, fleece covered white	3
3 FreeStyle L	Baffle, 1200 x 600 x 40 mm, coloured fabric	2
	Baffle, 1200 x 600 x 40 mm, fleece covered white	2

FreeStyle | Assembly accessories with system S 3

	Description/dimensions/surface	Units/pack
4	 <p>No. 12/.../2 hanger with double tension spring, double wire, pre-mounted, diameter: 4 mm, maximum load: 0.25 kN centre distance of hanger subject to baffle height and baffle combination</p>	100
5	 <p>No. 45 support profile, length: 3750 mm, height: 38 mm, width: 24 mm, visible side: white, distance: 625 mm</p>	25
6	 <p>No. 46 connection profile, length: 625 mm, height: 32 mm, width: 24 mm, visible side: white, distance: < 1562.5 mm</p>	75
7/8	Fitting set for system S 3 contains 2 pcs. tee grid clips incl. hanger brackets and 2 pcs. self-drill fixings incl. head geometry for hanger bracket	2

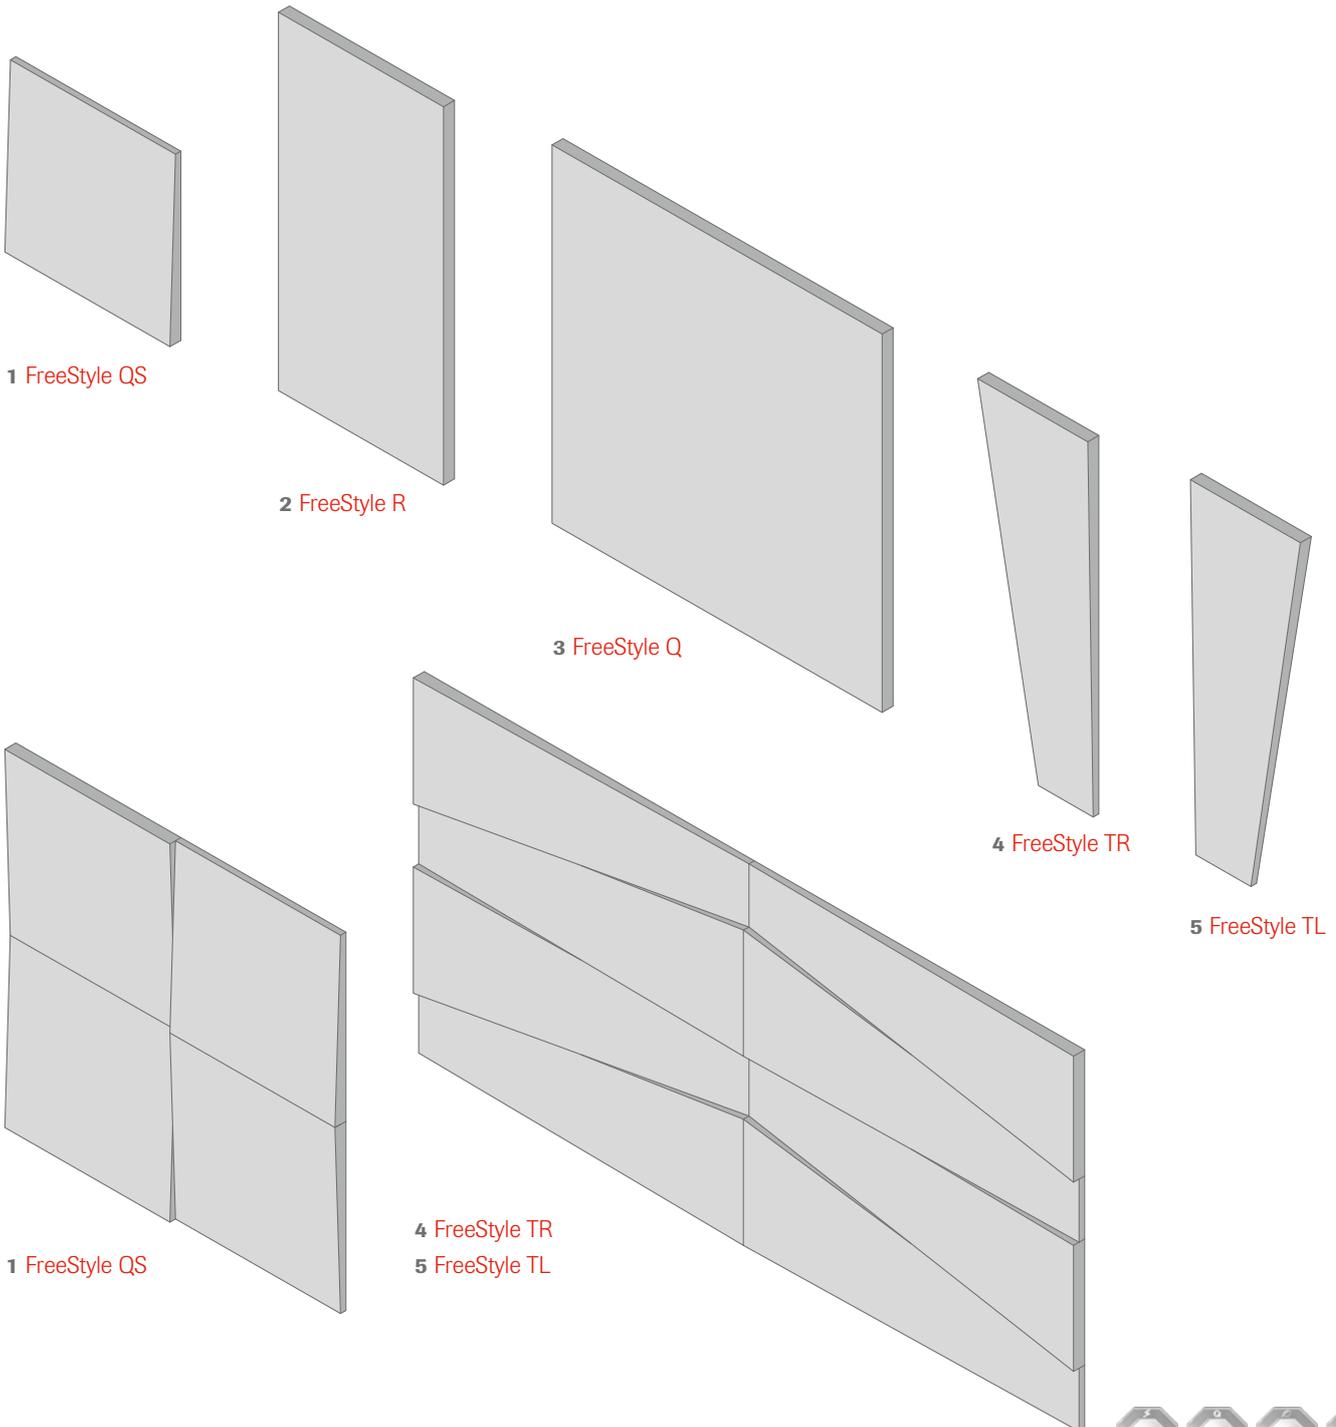


Technical data




Visible side	Coloured fabric
Edge	Coloured fabric
Edge detail	Straight edges, all the way round
Dimensions and weight	<p>FreeStyle QS: 600 x 600 x 40/20 mm, approx. 1.2 kg</p> <p>FreeStyle R: 1200 x 600 x 40 mm, approx. 3.0 kg</p> <p>FreeStyle Q: 1200 x 1200 x 40 mm, approx. 6.1 kg</p> <p>FreeStyle TL: 1200 x 400/200 x 40/20 mm, approx. 1.2 kg</p> <p>FreeStyle TR: 1200 x 400/200 x 40/20 mm, approx. 1.2 kg</p> <p>Special formats/special shapes on request.</p>
Grid suspension	Incl. wall claw
Sound absorption	 $\alpha_w = 0.90$ NRC = 0.85


FreeStyle Q

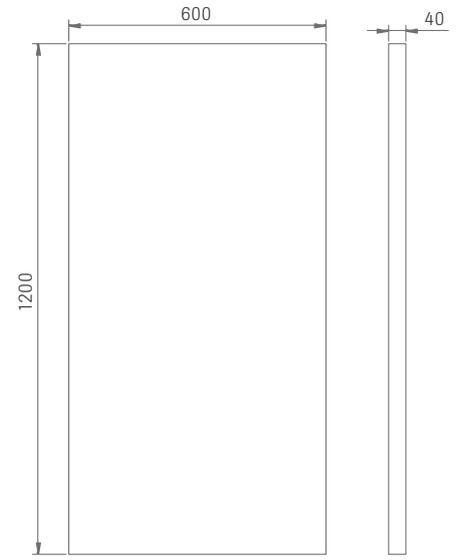


FreeStyle R

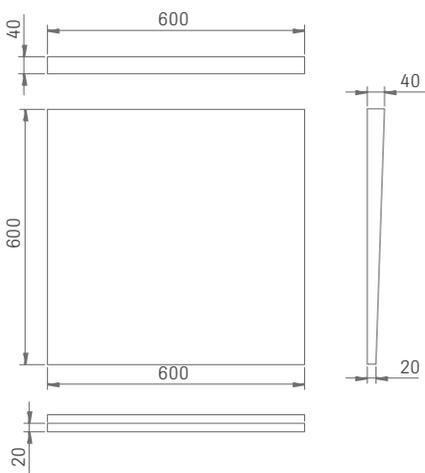


FreeStyle QS

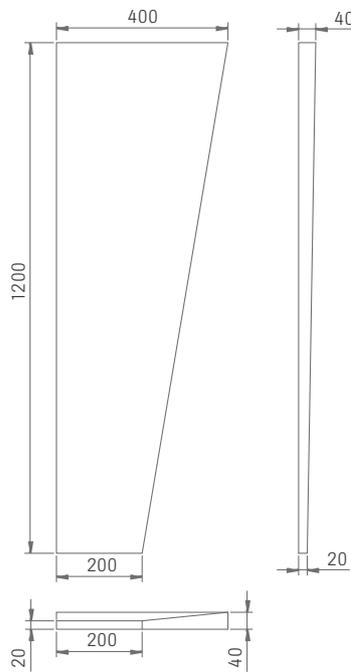


FreeStyle TL

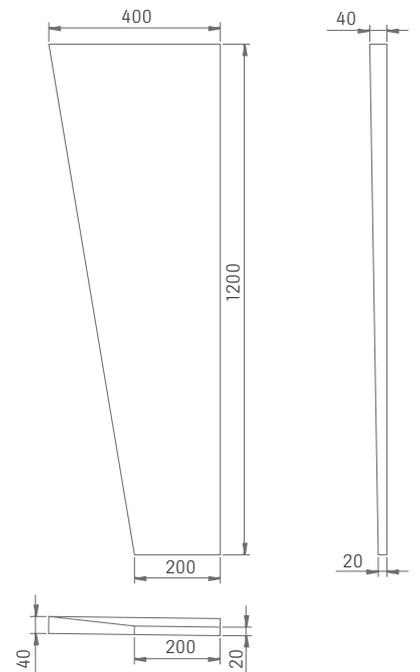


FreeStyle TR

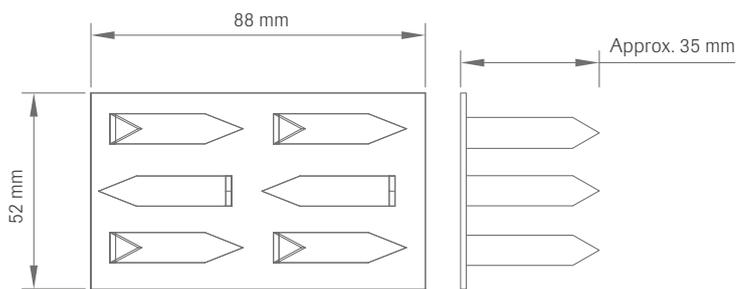

6 Wall claw for 40 mm strong wall absorber, claw height 35 mm

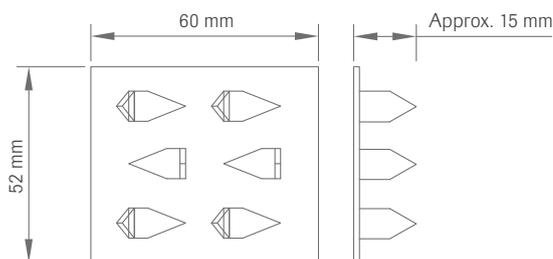

6 Wall claw for 40/20 mm strong wall absorber, claw height 15 mm

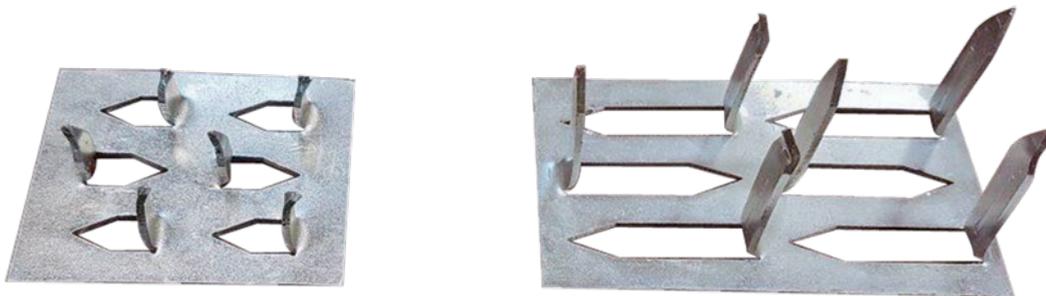

FreeStyle | Content wall absorber package

Pack	Description/dimensions	Units/pack
1 FreeStyle QS	Wall absorber, 600 x 600 x 40/20 mm	8
2 FreeStyle R	Wall absorber, 1200 x 600 x 40 mm	2
3 FreeStyle Q	Wall absorber, 1200 x 1200 x 40 mm	1
4 FreeStyle TR	Wall absorber trapeze right, 1200 x 400/200 x 40/20 mm	4
5 FreeStyle TL	Wall absorber trapeze left, 1200 x 400/200 x 40/20 mm	4

FreeStyle | Fitting set for wall installation


Description/dimensions
6 Wall installation set of 4 piece for FreeStyle Q und R, set contains 4 pieces of wall claws 88 x 52 x 35 x 1.0 mm
6 Wall installation set of 4 piece for FreeStyle TR, TL und QS, set contains 2 pieces of wall claws 60 x 52 x 15 x 1.0 mm and 2 pieces of wall claws 88 x 52 x 35 x 1.0 mm



52826 | Dark red



52827 | Red



52828 | Orange




52829 | Dark brown



52830 | Black



52831 | Dark grey




52832 | Yellow



52833 | Green-grey



52834 | Light grey



52835 | White




52836 | Light beige




52837 | Medium brown




52838 | Mottled brown



52839 | Grey



52840 | Mottled orange




52841 | Petrol




52842 | Mottled green



52843 | Blue




52844 | Midnight blue



52845 | Violet



55244 | Stone grey




55245 | Olive green



55246 | Light blue



55247 | Mint green



55248 | Dark green



55249 | Grey-blue



55250 | Light yellow

Technical specifications

Composition	100 % polyester; FR ATY yarn
Weave	Panama
Weight	320 g/m ²
Width	1500 mm (+/- 50 mm)



Product warranties

The information provided in this leaflet is based on the standards and data available at the time of publication. Any performance, warranties or guarantees provided, expressed or implied, are subject to the exclusive use of OWA components and the installation of those components in accordance with our recommendations. Failure to adhere to these conditions will result in the invalidation of any performance claims, warranties or guarantees and rejection of any liability. OWA reserves the right to make any technical improvements to the products, systems or services without prior notice. **All goods and services are supplied in accordance with our current Terms and Conditions of Sale.** Errors excepted!

The information in this brochure is up-to-date at the time of publication. Errors and mistakes excepted. Please contact our competence team OWAconsult for specific advice. Our experts will be happy to answer your questions under the following contact details: tel: +49 9373 201-444 or e-mail: info@owaconsult.de

OWA

Odenwald Faserplattenwerk GmbH

Dr.-F.-A.-Freundt-Straße 3 | 63916 Amorbach | Germany
tel +49 9373 201-0 | info@owa.de
www.owa-ceilings.com



www.blauer-engel.de/uz132

- low emission
- low pollutant content
- no adverse impact on health in indoor spaces