



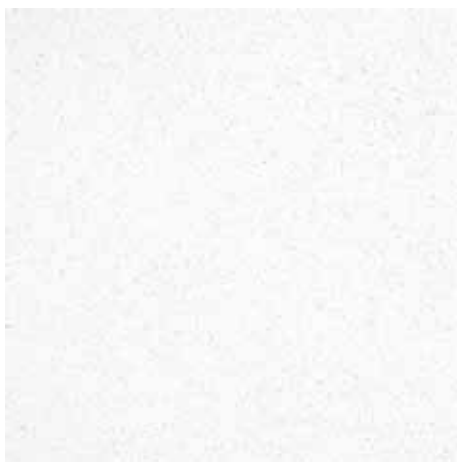
Decent surface with good
acoustic features

OWAlifetime collection




OWA

Sandila micro s

Decent surface with good acoustic features.



Sandila micro s

Material	Mineral tiles
Reaction to fire	A2-s1,d0 to EN 13501-1 class 1 (ASTM E84) class A (ASTM E 1264)
Colour	White
Thickness	14 mm nom. (OWAcoustic® smart)
Light reflection	Approx. 87 (ISO 7724-2, ISO 7724-3)
Sound reduction	$D_{n,f,w} = 29$ dB, CAC = 31 dB
Sound absorption	 $\alpha_w = 0.45$ NRC = 0.60
Moisture resistance	 up to 90 % RH
Resistance to fire*	 up to REI 180 (EN 13501-2)

* Dependent on system, soffit and other factors



Module sizes in mm	Exposed					
	S 3	S 3 cliq	S 3a	S 3a cliq	S 15 cliq	S 15a cliq
600 x 600	•	•	•	•	•	•
625 x 625	•	•	•	•	•	•



Odenwald Faserplattenwerk GmbH
 Dr.-F.-A.-Freundt-Straße 3 | 63916 Amorbach | Germany
 tel +49 93 73.2 01-0 | info@owa.de
 www.owa-ceilings.com