


OWAcliq 15/16 | exposed, demountable

OWAcliq systems are designed and manufactured to provide installers and building owners with strong, tight, long – lasting acoustical ceiling suspension.

OWAcliq 15/16


These economical 15/16" systems interface perfectly with standard building components such as lighting and air diffusers. The cliq cross tees feature override ends and staked-on clip connections meeting the E-580 compression and tension tests.

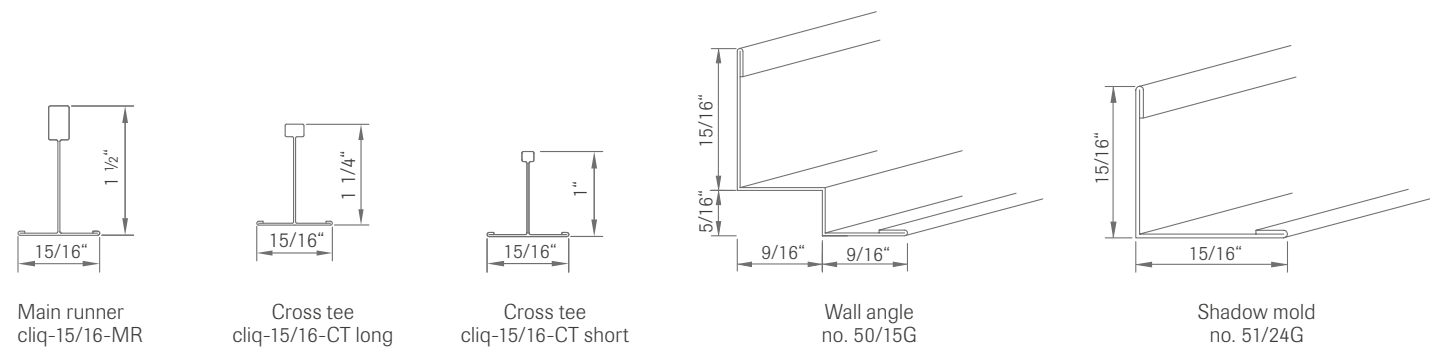


OWAcliq 15/16

	Description/rating per ASTM C-635	Pcs/ctn	LF/ctn	Weight/ctn	Ctns/pallet
cliq-15/16-MR	12' main runner, (Cliq system), 15/16", white	20	240	63	48
cliq-15/16-CT	4' cross tee, 15/16", cliq end, white	60	240	55	48
cliq-15/16-CT	2' cross tee, 15/16", cliq end, white	60	120	28	48
51/24G	12' wall angle, 15/16" x 15/16", white	40	240	31	96
50/15G	12' shadow mold, 15/16" x 9/16" x 5/16" x 9/16", white	35	420	54	To order



S 3 cliq

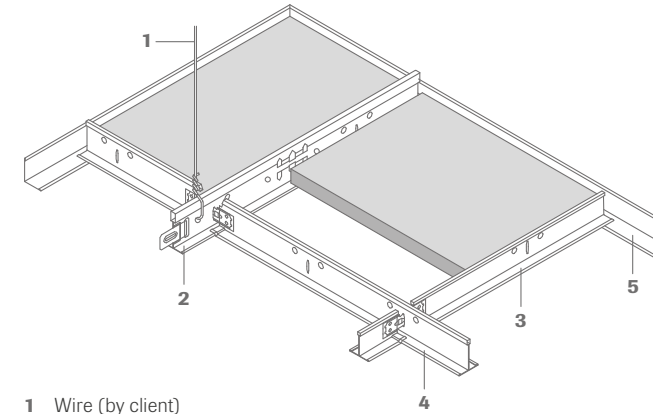

- 1 Wire (by client)
- 2 Main tee cliq-15/16-MR, slotted every 6"
- 3 Main tee cliq-15/16-CT, length 2'
- 4 Main tee cliq-15/16-CT, length 4'
- 5 Wall angle no. 51/24G
- 6 Shadow wall angle no. 50/15G
- 7 Contura block no. 42/24

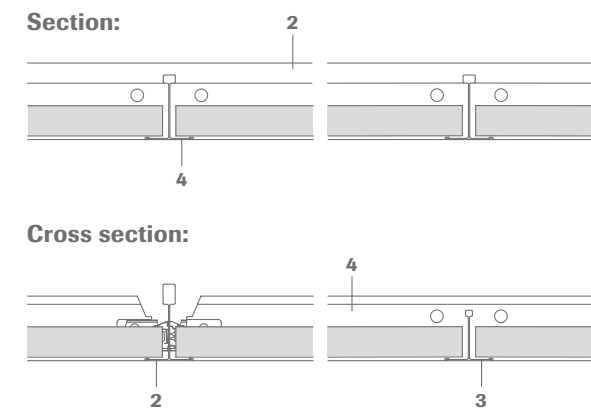

S 3a cliq

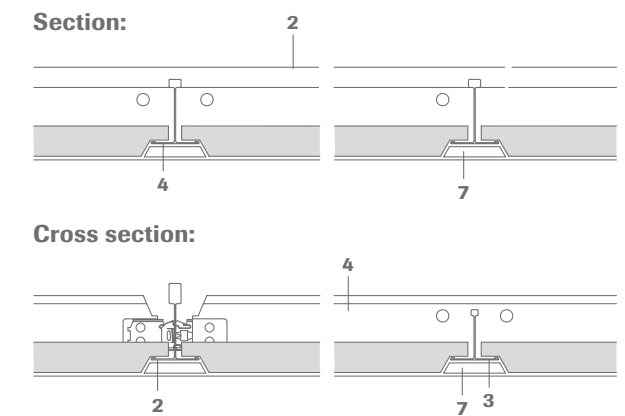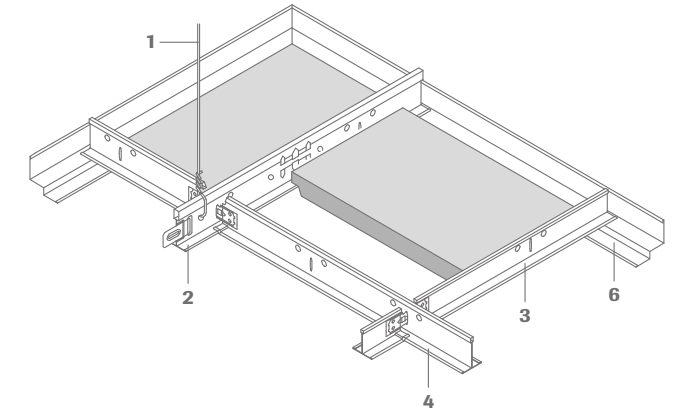

Technical data

Dimensions

Module sizes: 24" x 24", 48" x 24"

Edge detail

SQ

RE 15/16



Reaction to fire

OWAacoustic premium tiles: class 1 (ASTM E 84) | class A (ASTM E 1264)
OWAconstruct suspension parts: class 1 (ASTM E 84) | class A (ASTM E 1264)

Metal suspension

All metal components listed are galvanized steel or white coated galvanized steel respectively.

Suspension depth

3" - 4" (depending on the existing structural ceiling) for ease of panel removal 5" is recommended