


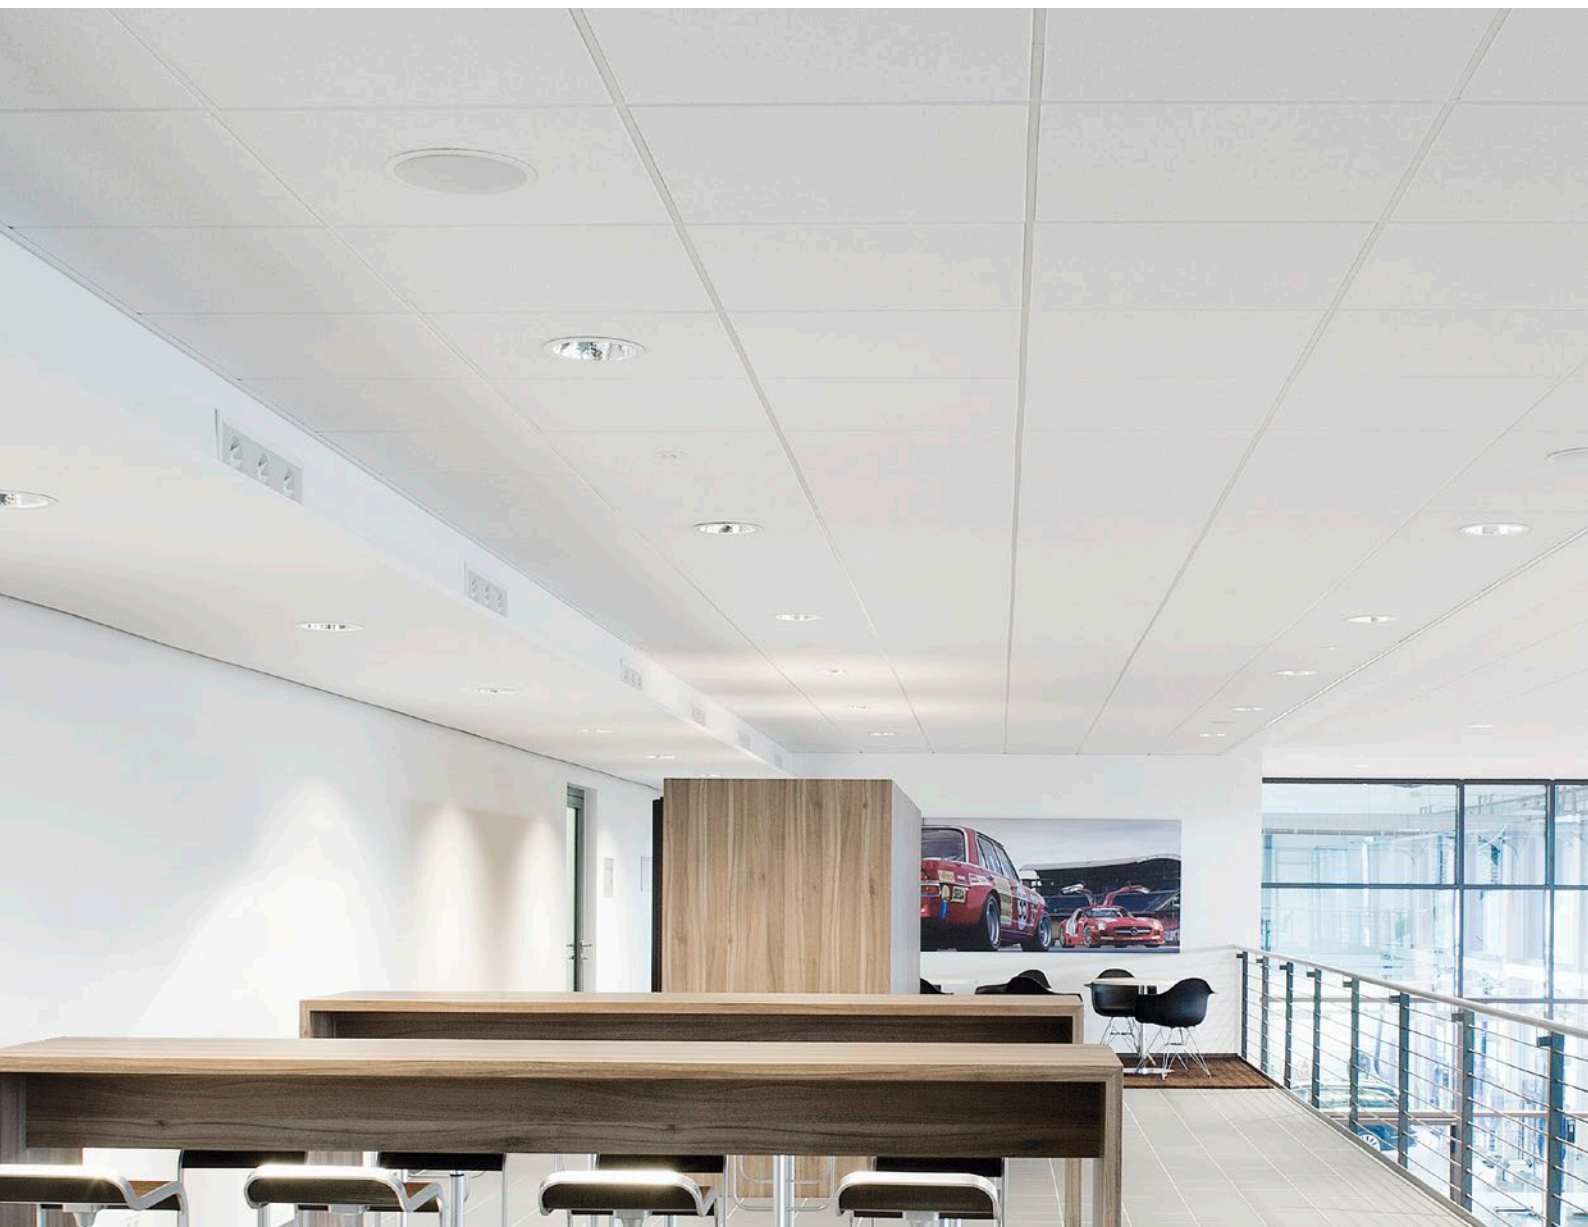

Product Portfolio 1/2025

Asia/Europe

Fleece-covered mineral tiles

Brillianto A 14 mm	4
Brillianto A 20 mm	4
Sinfonia	5
Sinfonia c	6
Sinfonia black	6
Sinfonia grey	7
Sinfonia Privacy	8
Sinfonia Reflecta	9
Sinfonia Silencia	10

Classic mineral tiles

Constellation	11
Constellation smart	12
Cosmos/N	13
Harmony smart	14
NEW Sandila/N	15
NEW Sandila/N smart	15
NEW Sandila NRC	16
NEW Sandila/O smart	16

Functional mineral tiles

Humancare Lab	17
Humancare Pro	17
Humancare Plus	18
Ocean	19
OWAlux® white	20
Sanitas 02 Plain	21
Sinfonia Humancare	22
Sinfonia c Humancare	22
Sinfonia Silencia Humancare	23

OWAconstruct 24**Elements**

Selecta fleece covered	25
Selecta coloured fabric	25
Selecta loop fleece covered	26
Selecta loop coloured fabric	26
Selecta concav	26
Selecta convex	26
FreeStyle baffles fleece covered	28
FreeStyle baffles coloured fabric	28

Fabric samples of the OWAcOLOR world of colours 30

Brillianto A

OWAcoustic premium

Brillianto A 14 mm

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m ²]	Packages/ pallet	Pallet content approx. [m ²]	Weight approx. [kg/m ²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m ²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00089666	600 x 600 x 14	12	4.32	44	190.08	3.08	0.90	A	23 dB	95% RH	REI 45	-
00091242	1200 x 600 x 14	10	7.2	28	201.6	2.93	0.90	A	23 dB	95% RH	-	-
Edge												
7												
00092086	600 x 600 x 14	12	4.32	44	190.08	2.93	0.90	A	23 dB	95% RH	-	-
00092092	1200 x 600 x 14	10	7.2	28	201.6	2.93	0.90	A	23 dB	95% RH	-	-
Edge												
17												
00092089	600 x 600 x 14	12	4.32	44	190.08	2.93	0.90	A	23 dB	95% RH	-	-
00092101	1200 x 600 x 14	10	7.2	28	201.6	2.93	0.90	A	23 dB	95% RH	-	250

OWAcoustic premium

Brillianto A 20 mm

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m ²]	Packages/ pallet	Pallet content approx. [m ²]	Weight approx. [kg/m ²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m ²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00079872	600 x 600 x 20	10	3.6	36	129.6	4.00	0.95	A	30 dB	95% RH	REI 60	-
00077568	1200 x 600 x 20	8	5.76	22	126.72	4.00	0.95	A	30 dB	95% RH	-	-

Sinfonia




OWAcoustic premium

Sinfonia

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00091499	600 x 600 x 15	12	4.32	40	172.8	3.10	0.90	A	29 dB	95% RH	REI 60	-
00091502	1200 x 600 x 15	10	7.2	24	172.8	3.10	0.90	A	29 dB	95% RH	-	-
00066924	2500 x 300 x 15	10	7.5	48	360	3.30	0.85	B	30 dB	95% RH	-	500
00071792	2500 x 400 x 15	10	10	36	360	3.30	0.85	B	30 dB	95% RH	-	250
Edge												
6												
00091505	600 x 600 x 15	10	3.6	48	172.8	3.10	0.90	A	29 dB	95% RH	-	-
00091508	1200 x 600 x 15	10	7.2	24	172.8	3.10	0.90	A	29 dB	95% RH	-	-
Edge												
15												
00091511	600 x 600 x 15	10	3.6	48	172.8	3.10	0.90	A	29 dB	95% RH	-	-
00091514	1200 x 600 x 15	10	7.2	24	172.8	3.10	0.90	A	29 dB	95% RH	-	250
Edge												
15g												
00091520	600 x 600 x 15	10	3.6	48	172.8	3.10	0.90	A	29 dB	95% RH	-	500
00091523	1200 x 600 x 15	10	7.2	24	172.8	3.10	0.90	A	29 dB	95% RH	-	500
Edge												
15b												
00091517	600 x 600 x 15	10	3.6	48	172.8	3.10	0.90	A	29 dB	95% RH	-	-


Sinfonia



OWAcoustic premium

Sinfonia c

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
1 3												
00068282	2000 x 300 x 15	10	6	48	288	4.20	0.70	C	34 dB	95% RH	-	500
00068832	2500 x 300 x 15	10	7.5	48	360	4.20	0.70	C	34 dB	95% RH	-	-
00068686	2500 x 400 x 15	10	10	36	360	4.20	0.70	C	34 dB	95% RH	-	-



OWAcoustic premium

Sinfonia black

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00091558	600 x 600 x 15	12	4.32	40	172.8	3.10	0.85	B	29 dB	95% RH	REI 60	-
00091561	1200 x 600 x 15	10	7.2	24	172.8	3.10	0.85	B	29 dB	95% RH	-	250

Sinfonia



OWAcoustic premium

Sinfonia grey

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00091550	600 x 600 x 15	12	4.32	40	172.8	3.10	0.85	B	29 dB	95% RH	REI 60	-
00091553	1200 x 600 x 15	10	7.2	24	172.8	3.10	0.85	B	29 dB	95% RH	-	250

Sinfonia Privacy



OWAcoustic premium

Sinfonia Privacy

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m ²]	Packages/ pallet	Pallet content approx. [m ²]	Weight approx. [kg/m ²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m ²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00079625	600 x 600 x 20	10	3.6	36	129.6	6.40	0.70	C	41 dB	95% RH	REI 180	-
00079628	1200 x 600 x 20	8	5.76	22	126.72	6.40	0.70	C	41 dB	95% RH	REI 60	-
00079659	2500 x 300 x 20	8	6	44	2841.669	6.40	0.70	C	41 dB	95% RH	-	250
Edge												
6												
00079633	600 x 600 x 20	10	3.6	36	129.6	6.40	0.70	C	41 dB	95% RH	REI 180	-
00079636	1200 x 600 x 20	8	5.76	22	126.72	6.40	0.70	C	41 dB	95% RH	REI 60	250
Edge												
15												
00079639	600 x 600 x 20	10	3.60	36	129.6	6.40	0.70	C	41 dB	95% RH	REI 90	250
00079642	1200 x 600 x 20	8	5.76	22	126.72	6.40	0.70	C	41 dB	95% RH	-	250

Sinfonia Reflecta




OWAcoustic premium

Sinfonia Reflecta

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m ²]	Packages/ pallet	Pallet content approx. [m ²]	Weight approx. [kg/m ²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m ²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00077457	600 x 600 x 15	12	4.32	44	190.08	4.80	0.15	E	37 dB	95% RH	REI 180	-
Edge												
6												
00077460	600 x 600 x 15	10	3.6	52	187.2	4.80	0.15	E	37 dB	95% RH	REI 180	250

Sinfonia Silencia



OWAcoustic premium

Sinfonia Silencia

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00079391	600 x 600 x 20	10	3.6	36	129.6	3.30	1.00	A	24 dB	95% RH	REI 45	-
00079395	1200 x 600 x 20	8	5.76	22	126.72	3.30	1.00	A	24 dB	95% RH	-	-
00079451	1200 x 300 x 20	8	2.88	44	126.72	3.30	1.00	A	24 dB	95% RH	-	250
00079460	2500 x 400 x 20	8	8	33	264	3.30	1.00	A	24 dB	95% RH	-	250
Edge												
6												
00079407	600 x 600 x 20	10	3.6	36	129.6	3.30	1.00	A	24 dB	95% RH	-	-
00079410	1200 x 600 x 20	8	5.76	22	126.72	3.30	1.00	A	24 dB	95% RH	-	250
Edge												
15												
00079414	600 x 600 x 20	10	3.6	36	129.6	3.30	1.00	A	24 dB	95% RH	-	-
00079417	1200 x 600 x 20	8	5.76	22	126.72	3.30	1.00	A	24 dB	95% RH	-	250
Edge												
15g												
00079420	600 x 600 x 20	10	3.6	36	129.6	3.30	1.00	A	24 dB	95% RH	-	500
00079423	1200 x 600 x 20	8	5.76	22	126.72	3.30	1.00	A	24 dB	95% RH	-	500
Edge												
15b												
00080137	600 x 600 x 20	10	3.6	36	129.6	3.30	1.00	A	24 dB	95% RH	-	250

Constellation



OWAcooustic premium

Constellation

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00000011	600 x 600 x 15	12	4.32	44	190.08	4.00	0.80	B	33 dB	95% RH	REI 180	-
00073782	1200 x 600 x 15	10	7.2	26	187.2	4.00	0.80	B	33 dB	95% RH	REI 60	-
00000773	2000 x 300 x 15	10	6	48	288	4.00	0.80	B	33 dB	95% RH	-	500
00000887	2000 x 400 x 15	10	8	36	288	4.00	0.80	B	33 dB	95% RH	-	250
00000913	2500 x 400 x 15	10	10	36	360	4.00	0.80	B	33 dB	95% RH	-	500
Edge												
6												
00000012	600 x 600 x 15	10	3.6	52	187.2	4.00	0.80	B	33 dB	95% RH	REI 180	-
00073867	1200 x 600 x 15	10	7.2	26	187.2	4.00	0.80	B	33 dB	95% RH	REI 60	250
Edge												
15												
00013254	600 x 600 x 15	10	3.6	52	187.2	4.00	0.80	B	33 dB	95% RH	REI 90	500
00074630	1200 x 600 x 15	10	7.2	26	187.2	4.00	0.80	B	33 dB	95% RH	-	250
Edge												
1 3												
00013070	2000 x 300 x 15	10	6	48	288	4.50	0.80	B	35 dB	95% RH	REI 90	250
00010612	2500 x 300 x 15	10	7.5	48	360	4.50	0.80	B	35 dB	95% RH	-	250
00012798	2500 x 400 x 15	10	10	36	360	4.50	0.80	B	35 dB	95% RH	-	-

Constellation smart



OWAcoustic premium
Constellation smart

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00043735	600 x 600 x 14	12	4.32	48	207.36	3.90	0.60	C	31 dB	90% RH	-	-
00043931	1200 x 600 x 14	10	7.2	30	216	3.90	0.60	C	31 dB	90% RH	-	-

Cosmos/N



OWAcoustic premium

Cosmos/N

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00000115	600 x 600 x 15	12	4.32	44	190.08	4.00	0.65	C	33 dB	95% RH	REI 180	-
00073786	1200 x 600 x 15	10	7.2	26	187.2	4.00	0.65	C	33 dB	95% RH	REI 60	-
00013711	2000 x 300 x 15	10	6	48	288	4.00	0.65	C	33 dB	95% RH	-	500
00013282	2000 x 400 x 15	10	8	36	288	4.00	0.65	C	33 dB	95% RH	-	500
00013712	2500 x 300 x 15	10	7.5	48	360	4.00	0.65	C	33 dB	95% RH	-	250
00013443	2500 x 400 x 15	10	10	36	360	4.00	0.65	C	33 dB	95% RH	-	500
Edge												
6												
00000116	600 x 600 x 15	10	3.6	52	187.2	4.00	0.65	C	33 dB	95% RH	REI 180	-
00073868	1200 x 600 x 15	10	7.2	26	187.2	4.00	0.65	C	33 dB	95% RH	REI 60	250
Edge												
15												
00000117	600 x 600 x 15	10	3.6	52	187.2	4.00	0.65	C	33 dB	95% RH	REI 90	-
00074607	1200 x 600 x 15	10	7.2	26	187.2	4.00	0.65	C	33 dB	95% RH	-	250
Edge												
1 3												
00016210	1800 x 300 x 15	10	5.4	48	259.2	4.50	0.65	C	35 dB	95% RH	REI 90	250
00012571	2000 x 400 x 15	10	8	36	288	4.50	0.65	C	35 dB	95% RH	-	250
00000637	2500 x 300 x 15	10	7.5	48	360	4.50	0.65	C	35 dB	95% RH	-	500
00011773	2500 x 400 x 15	10	10	36	360	4.50	0.65	C	35 dB	95% RH	-	500


Harmony smart



OWAcoustic premium
Harmony smart

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00043734	600 x 600 x 14	12	4.32	48	207.36	4.80	0.65	C	31 dB	90% RH	-	-

NEW Sandila/N



OWAcoustic premium

NEW Sandila/N

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m ²]	Packages/ pallet	Pallet content approx. [m ²]	Weight approx. [kg/m ²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m ²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00075469	600 x 600 x 15	12	4.32	44	190.08	4.30	0.65	C	33 dB	95% RH	REI 180	-
00075490	1200 x 600 x 15	10	7.2	26	187.2	4.30	0.65	C	33 dB	95% RH	REI 60	-
Edge												
6												
00075470	600 x 600 x 15	10	3.6	52	187.2	4.30	0.65	C	33 dB	95% RH	REI 180	-
00075500	1200 x 600 x 15	10	7.2	26	187.2	4.30	0.65	C	33 dB	95% RH	REI 60	500
Edge												
15												
00075471	600 x 600 x 15	10	3.6	52	187.2	4.30	0.65	C	33 dB	95% RH	REI 90	250
00075501	1200 x 600 x 15	10	7.2	26	187.2	4.30	0.65	C	33 dB	95% RH	-	250




OWAcoustic premium

NEW Sandila/N smart

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m ²]	Packages/ pallet	Pallet content approx. [m ²]	Weight approx. [kg/m ²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m ²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00075289	600 x 600 x 14	12	4.32	48	207.36	4.20	0.60	D	31 dB	90% RH	-	-
00075437	1200 x 600 x 14	10	7.2	30	216	4.20	0.60	D	31 dB	90% RH	-	-


NEW Sandila



OWAcoustic premium

NEW Sandila NRC

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m ²]	Packages/ pallet	Pallet content approx. [m ²]	Weight approx. [kg/m ²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m ²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00075455	600 x 600 x 15	12	4.32	44	190.08	4.30	0.75	C	33 dB	95% RH	REI 180	-
Edge												
6												
00075977	600 x 600 x 15	10	3.6	52	187.2	4.30	0.75	C	33 dB	95% RH	REI 180	500



OWAcoustic premium

NEW Sandila/O smart

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m ²]	Packages/ pallet	Pallet content approx. [m ²]	Weight approx. [kg/m ²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m ²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00075439	600 x 600 x 14	12	4.32	48	207.36	4.20	0.15	E	35 dB	90% RH	-	-

Humancare



OWAcoustic premium

Humancare Lab

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m ²]	Packages/ pallet	Pallet content approx. [m ²]	Weight approx. [kg/m ²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m ²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3vs												
00087637	600 x 600 x 20	10	3.6	36	129.6	5.20	0.70	C	34 dB	100% RH	REI 60	-
00087639	1200 x 600 x 20	8	5.76	22	126.72	5.20	0.70	C	34 dB	100% RH	-	250



OWAcoustic premium

Humancare Pro

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m ²]	Packages/ pallet	Pallet content approx. [m ²]	Weight approx. [kg/m ²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m ²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3vs												
00087633	600 x 600 x 20	10	3.6	36	129.6	3.30	0.95	A	24 dB	100% RH	REI 45	-
00087635	1200 x 600 x 20	8	5.76	22	126.72	3.30	0.95	A	24 dB	95% RH	-	250

Humancare Plus



OWAcoustic premium

Humancare Plus

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00087595	600 x 600 x 20	10	3.6	36	129.6	4.40	0.90	A	30 dB	100% RH	REI 60	-
00087601	1200 x 600 x 20	8	5.76	22	126.72	4.40	0.90	A	30 dB	100% RH	-	250
Edge												
6												
00087616	600 x 600 x 20	10	3.6	36	129.6	4.40	0.90	A	30 dB	100% RH	-	250
00087618	1200 x 600 x 20	8	5.76	22	126.72	4.40	0.90	A	30 dB	100% RH	-	250
Edge												
15												
00087621	600 x 600 x 20	10	3.6	36	129.6	4.40	0.90	A	30 dB	100% RH	-	250
00087623	1200 x 600 x 20	8	5.76	22	126.72	4.40	0.90	A	30 dB	100% RH	-	250
Edge												
15b												
00087625	600 x 600 x 20	10	3.6	36	129.6	4.40	0.90	A	30 dB	100% RH	-	250
Edge												
15g												
00087629	600 x 600 x 20	10	3.6	36	129.6	4.40	0.90	A	30 dB	100% RH	-	500
00087631	1200 x 600 x 20	8	5.76	22	126.72	4.40	0.90	A	30 dB	100% RH	-	500

Ocean



OWAcooustic premium

Ocean

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00079876	600 x 600 x 20	10	3.6	36	129.6	4.00	0.95	A	30 dB	100% RH	REI 60	-

OWAlux® white



OWAcoustic premium
OWAlux® white

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00023709	600 x 600 x 15	10	3.6	48	172.8	4.20	0.15	E	37 dB	95% RH	REI 60	250

Sanitas 02 | Plain




OWAcoustic premium

Sanitas 02 | Plain

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00046159	600 x 600 x 15	12	4.32	44	190.08	4.29	0.15	E	37 dB	95% RH	REI 180	250
00073847	1200 x 600 x 15	10	7.2	26	187.2	4.29	0.15	E	37 dB	95% RH	REI 60	250


Sinfonia | Humancare



OWAcoustic premium

Sinfonia | Humancare

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00091526	600 x 600 x 15	12	4.32	40	172.8	3.10	0.90	A	29 dB	95% RH	REI 60	-
00091529	1200 x 600 x 15	10	7.2	24	172.8	3.10	0.90	A	29 dB	95% RH	-	-
Edge												
6												
00091532	600 x 600 x 15	10	3.6	48	172.8	3.10	0.90	A	29 dB	95% RH	-	250
00091535	1200 x 600 x 15	10	7.2	24	172.8	3.10	0.90	A	29 dB	95% RH	-	250
Edge												
15												
00091538	600 x 600 x 15	10	3.6	48	172.8	3.10	0.90	A	29 dB	95% RH	-	250
00091541	1200 x 600 x 15	10	7.2	24	172.8	3.10	0.90	A	29 dB	95% RH	-	250



OWAcoustic premium

Sinfonia c | Humancare

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
1 3												
00088046	2000 x 300 x 15	10	6	48	288	4.20	0.70	C	34 dB	95% RH	-	1000
00088048	2500 x 300 x 15	10	7.5	48	360	4.20	0.70	C	34 dB	95% RH	-	1000
00088050	2500 x 400 x 15	10	10	36	360	4.20	0.70	C	34 dB	95% RH	-	1000

Sinfonia Silencia | Humancare














OWAcoustic premium

Sinfonia Silencia | Humancare

Item no.	Dimensions (nom.) [mm]	Pieces/ package	Package content approx. [m²]	Packages/ pallet	Pallet content approx. [m²]	Weight approx. [kg/m²]	NRC (EN ISO 11654)	Absorption class	CAC (ISO 10848-2)	Humidity resistance	Resistance to fire*	Minimum Order Quantity [m²]
*up to - dependent on system, soffit and other specific factors												
Edge												
3												
00079906	600 x 600 x 20	10	3.6	36	129.6	3.30	1.00	A	24 dB	95% RH	REI 45	250
00079908	1200 x 600 x 20	8	5.76	22	126.72	3.30	1.00	A	24 dB	95% RH	-	250
Edge												
6												
00079923	600 x 600 x 20	10	3.6	36	129.6	3.30	1.00	A	24 dB	95% RH	-	250
00079925	1200 x 600 x 20	8	5.76	22	126.72	3.30	1.00	A	24 dB	95% RH	-	250
Edge												
15												
00079935	600 x 600 x 20	10	3.6	36	129.6	3.30	1.00	A	24 dB	95% RH	-	250
00079937	1200 x 600 x 20	8	5.76	22	126.72	3.30	1.00	A	24 dB	95% RH	-	250

OWAconstruct

Illustration	Description	Dimension/surface	Part no.	Units/pack
	cliq-15-MR Main tee width 15 mm	Height: 38 mm length: 3000 mm visible side white	00068517	20 pieces
	cliq-15-CT Cross tee short width 15 mm, joggled	Height: 38 mm length: 600 mm visible side white	00068518	60 pieces
	cliq-15-CT Cross tee long width 15 mm, joggled	Height: 38 mm length: 1200 mm visible side white	00070248	60 pieces
	cliq-24-MR Main tee width 24 mm	Height: 38 mm length: 3600 mm visible side white	00066020	20 pieces
	cliq-24-CT Cross tee short, width 24 mm, joggled	Height: 25 mm length: 600 mm visible side white	00061863	60 pieces
	cliq-24-CT Cross tee long, width 24 mm, joggled	Height: 32 mm length: 1200 mm visible side white	00066022	60 pieces
	No. 45 Main tee width 24 mm	Height: 38 mm length: 3700 mm visible side white other colours on request	00066014	Packet 25 pieces
	No. 46 Cross tee width 24 mm, butt-jointed	Height: 32 mm length: 600 mm visible side white other colours on request	00059103	Packet 75 pieces
	No. 47 Cross tee width 24 mm, butt-jointed	Height: 32 mm length: 1200 mm visible side white other colours on request	00066016	Packet 50 pieces
	No. 50G Wall angle	Height: 24 mm width: 19 mm length: 3050 mm visible side white other colours on request	00066368	Packet 40 pieces
	No. 50/15 Shadow wall angle	Height: 33 mm total width: 30 mm visible width: 15 mm length: 3050 mm visible side white	00017825	Packet 35 pieces

Selecta



OWAconsult collecton Selecta fleece covered

	Length	Width	Thickness	Visible sides	Part no.
Selecta one	1200 mm	1200 mm	40 mm	fleece covered white	00074782
				fleece covered grey	00093110
				fleece covered black	00093109
Selecta plus	1800 mm	1200 mm	40 mm	fleece covered white	00074783
				fleece covered grey	00093112
				fleece covered black	00093111
Selecta grande	2400 mm	1200 mm	40 mm	fleece covered white	00074780
				fleece covered grey	00093114
				fleece covered black	00093113
Selecta grande XL	3000 mm	1200 mm	40 mm	fleece covered white	00092154
				fleece covered grey	00093116
				fleece covered black	00093115

One free pair of gloves is included in the box.



OWAconsult collecton Selecta coloured fabric

	Length	Width	Thickness	Visible sides	Part no.
Selecta one	1200 mm	1200 mm	40 mm	coloured fabric	on request
Selecta plus	1800 mm	1200 mm	40 mm	coloured fabric	on request
Selecta grande	2400 mm	1200 mm	40 mm	coloured fabric	on request
Selecta grande XL	3000 mm	1200 mm	40 mm	coloured fabric	on request


Packing unit for all canopies: 1 piece per parcel.

Absorption values see [brochure 1964 e Canopies](#).

Special formats/special shapes on request.

Selecta grande XL


Selecta grande

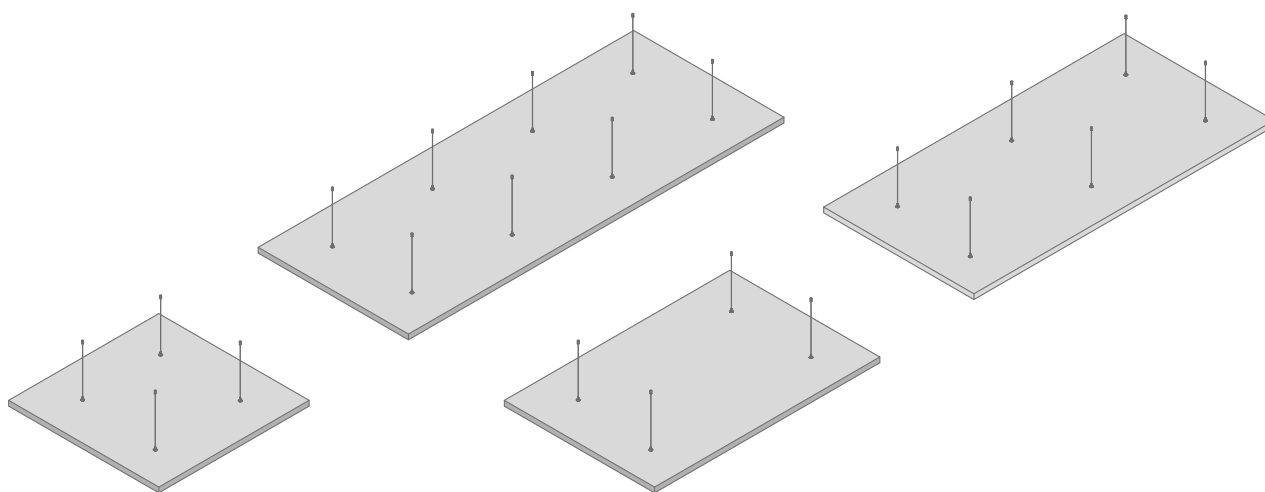

Selecta one

Selecta plus

Selecta




OWAconsult collecton

Selecta loop fleece covered

	Diameter	Thickness	Visible sides	Part no.
Selecta loop	Ø 800 mm	40 mm	fleece covered white	00089444
			fleece covered grey	00093118
			fleece covered black	00093117
Selecta loop	Ø 1000 mm	40 mm	fleece covered white	00089445
			fleece covered grey	00093120
			fleece covered black	00093119
Selecta loop	Ø 1200 mm	40 mm	fleece covered white	00089434
			fleece covered grey	00093122
			fleece covered black	00093121


One free pair of gloves is included in the box.



OWAconsult collecton

Selecta loop coloured fabric

	Diameter	Thickness	Visible sides	Part no.
Selecta loop	Ø 800 mm	40 mm	coloured fabric	on request
Selecta loop	Ø 1000 mm	40 mm	coloured fabric	on request
Selecta loop	Ø 1200 mm	40 mm	coloured fabric	on request




OWAconsult collecton

Selecta concav

	Length	Width	Thickness	Visible sides	Part no.
Selecta concav	1200 mm	1200 mm	40 mm	fleece covered white	00089439

One free pair of gloves is included in the box.



OWAconsult collecton

Selecta convex

	Length	Width	Thickness	Visible sides	Part no.
Selecta convex	1200 mm	1200 mm	40 mm	fleece covered white	00089440

One free pair of gloves is included in the box.

Packing unit for all canopies: 1 piece per parcel.

Absorption values see [brochure 1964 e Canopies](#).

Special formats/special shapes on request.

Selecta installation sets

Installation accessories for Selecta one/plus

	Component description	Part no.
Ceiling installation	Set contains: 4 pcs. wire rope (length 1500 mm), spiral hanger with quick adjuster and M6 ceiling fixing	00082764
Direct installation	Set contains: 2 pcs. Z-hooks and 2 pcs. hanger bolts, 2 sets are needed for the 4 fixing points	00088137
Wall installation	Set contains: 4 pcs. wall claws	00073602
Connecting clip	Fixing distance of the connecting clamps < 300 mm. PU/package: 25 pieces	00080545

Installation accessories for Selecta grande

	Component description	Part no.
Ceiling installation	Set contains: 6 pcs. wire rope (length 1500 mm), spiral hanger with quick adjuster and M6 ceiling fixing	00082763
Direct installation	Set contains: 2 pcs. Z-hooks and 2 pcs. hanger bolts, 3 sets are needed for the 6 fixing points	00088137
Wall installation	Set contains: 6 pcs. wall claws	00073603
Connecting clip	Fixing distance of the connecting clamps < 300 mm. PU/package: 25 pieces	00080545

Installation accessories for Selecta grande XL

	Component description	Part no.
Ceiling installation	2 x Set contains: 4 pcs. wire rope (length 1500 mm), spiral hanger with quick adjuster and M6 ceiling fixing	00082764
Direct installation	Set contains: 2 pcs. Z-hooks and 2 pcs. hanger bolts, 3 sets are needed for the 6 fixing points	00088137
Wall installation	2 x Set contains: 4 pcs. wall claws	00073602
Connecting clip	Fixing distance of the connecting clamps < 300 mm. PU/package: 25 pieces	00080545

Installation accessories for Selecta convex and concav

	Component description	Part no.
Ceiling installation	Set contains: 4 pcs. wire rope (length 1500 mm), spiral hanger with quick adjuster and M6 ceiling fixing	00082764
Connecting clip	Fixing distance of the connecting clamps < 300 mm. PU/package: 25 pieces	00080545


Installation accessories for Selecta loop

	Component description	Part no.
Ceiling installation	Set contains: 3 pcs. wire rope (length 1500 mm), spiral hanger with quick adjuster and M6 ceiling fixing	00082762
Direct installation	Set contains: 2 pcs. Z-hooks and 2 pcs. hanger bolts, 2 sets are needed for the 3 fixing points	00088137
Wall installation	Set contains: 6 pcs. wall claws	00073603
Connecting clip	Fixing distance of the connecting clamps < 300 mm. PU/package: 25 pieces	00080545

The installation sets must be ordered separately for each canopy/wall absorber. They are not included with the product.

For wall installation, the absorption will be reduced to $\alpha_w = 0.90$ and $NRC = 0.85$. See brochure 1587 e absorbers.


The installation accessories for ceiling mounting and direct mounting are only approved for static and stationary loads. They are unsuitable for moving dynamic loads.



Z-hooks for direct installation



Wall claw for wall installation




Connecting clip for mounting two or more Selecta canopies to each other



Wire rope set for ceiling installation

FreeStyle baffles




OWAconsult collecton

FreeStyle baffles fleece covered

	Length	Height	Thickness	Part no.	Colour fabric	Units
FreeStyle S	1200 mm	200 mm	40 mm	00089441	fleece covered white	6
				00093123	fleece covered grey	
				00093124	fleece covered black	
FreeStyle M	1200 mm	400 mm	40 mm	00089442	fleece covered white	3
				00093126	fleece covered grey	
				00093125	fleece covered black	
FreeStyle L	1200 mm	600 mm	40 mm	00089443	fleece covered white	2
				00093128	fleece covered grey	
				00093127	fleece covered black	

One free pair of gloves is included in the box.



OWAconsult collecton

FreeStyle baffles coloured fabric

	Length	Height	Thickness	Part no.	Colour fabric	Units
FreeStyle S	1200 mm	200 mm	40 mm	on request	coloured fabric	6
FreeStyle M	1200 mm	400 mm	40 mm	on request	coloured fabric	3
FreeStyle L	1200 mm	600 mm	40 mm	on request	coloured fabric	2

Special formats/special shapes on request.

Absorption values see [brochure 1964 e Canopies](#).


FreeStyle baffles fitting sets

Fitting set for wire suspension

Component description/dimension	Part no.	Units
Set contains: 2 pcs. wire rope (length 1500 mm), spiral hanger with quick adjuster and M6 ceiling fixing	00082765	1 set
Connecting clip for longitudinal joint of baffles on the top	00080545	25 pieces
Plastic pin for longitudinal connection of two baffles in the lower area	00082538	200 pieces

Please order one fitting set per baffle.

The ceiling installation fixing sets are only approved for static loads, they are unsuitable for dynamic loads.

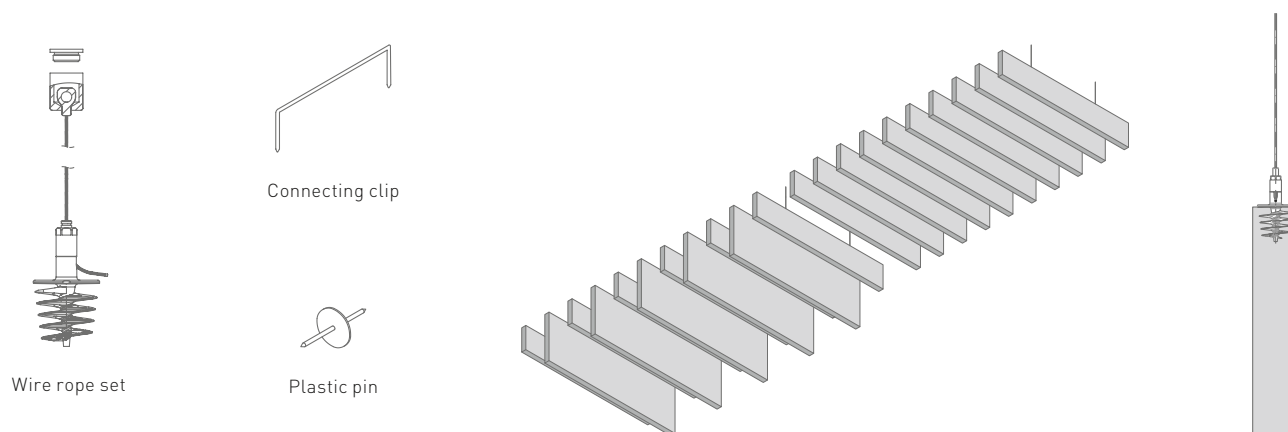


Fitting set with system S 3


	Product no.	Product/component description	Part no.	Units
1	12/30/2	Adjustable hanger with double tension spring diameter: 4 mm, maximum load: 0.25 KN, max. range of extension: 270 mm a wire overhang of at least 15 mm must be provided	00075052	100 pieces
2	45	Main tee, height: 38 mm, width: 24 mm length: 3750 mm, visible side: white	00066011	25 pieces
3	46	Cross tee, height: 32 mm, width: 24 mm length: 625 mm, visible side: white	00059095	75 pieces
4/5		Fitting set for system S 3 contains: 2 pcs. fastening clips (incl. hanger brackets) and 2 pcs. spiral hanger (incl. head geometry for hanger bracket)	00091457	1 set
		Connecting clamp for longitudinal baffle connection	00080545	25 pieces
		Plastic pin for longitudinal connection of two baffles in the lower area	00082538	200 pieces

Please order one fitting set per baffle.

The ceiling installation fixing sets are only approved for static loads, they are unsuitable for dynamic loads.

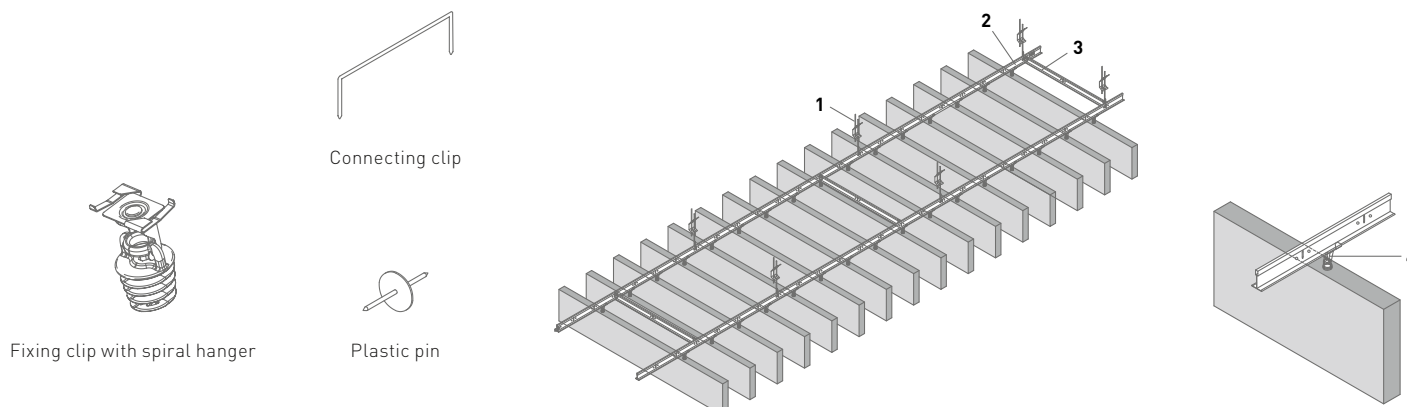


Fabric samples of the OWAcolor world of colours



52826 | Dark red



52827 | Red




52828 | Orange




52829 | Dark brown




52830 | Black



52831 | Dark grey




52832 | Yellow



52833 | Green-grey



52834 | Light grey




52835 | White




52836 | Light beige




52837 | Medium brown




52838 | Mottled brown




52839 | Grey



52840 | Mottled orange




52841 | Petrol




52842 | Mottled green



52843 | Blue




52844 | Midnight blue



52845 | Violet



55244 | Stone grey




55245 | Olive green



55246 | Light blue



55247 | Mint green



55248 | Dark green



55249 | Grey-blue



55250 | Light yellow

Technical specifications

Composition	100 % polyester, FR ATY yarn
Weave	Panama
Weight	320 g/m2
Width	1500 mm (+/- 50 mm)

Legal notice

The printing-related colour and quality variations in this catalogue may result in deviations to the original product. A binding product selection should therefore always be made based on an original sample. All details and technical information in these brochures or other publications that relate to OWA ceiling systems are based on test results that were achieved under laboratory conditions. It is the customer's responsibility to ensure that this information is appropriate for their specific application. All system-related data and statements correspond to the current state of technology. They assume the exclusive application of OWA products and their interdependent behaviour which is confirmed by internal and external testing. If they are used in combination with non-OWA products, any warranties or guarantees are invalidated and liability will not be accepted. Subject to technical changes for the purpose of product or system updates. Subject to technical changes without prior announcement. Our general sales, delivery and payment terms and conditions apply. Prices are subject to change without notice.

Subject to mistakes and printing errors.

